

TEAC



One size DOES fit ALL
Pure Recording & True Integration, Simplified




Built with a purpose

UR-Xi



Quality you can trust

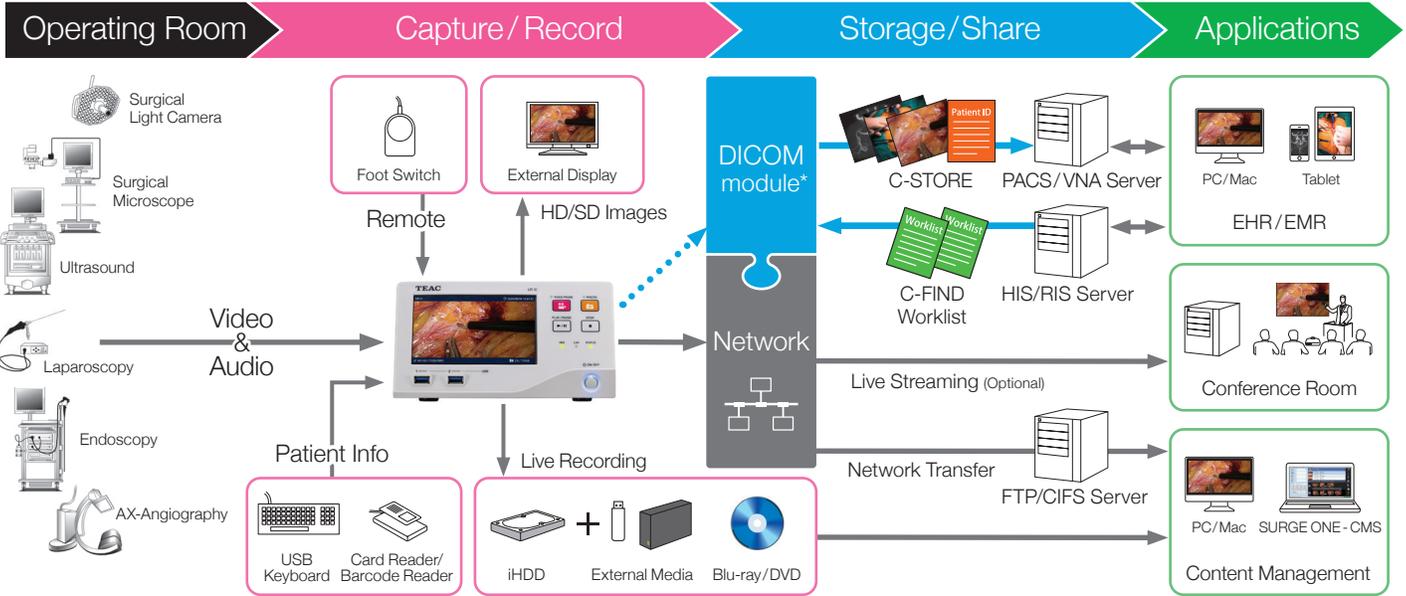

Product Overview

Today, medical video recording is more relevant across all surgical fields. While it has become more approachable than ever before, understanding all the many factors involved in the setup can still be overwhelming. The variations in modality, camera system, hardware and software can create a barrier to getting started. With **TEAC's new UR-Xi** all-in-one system, ease of use is as easy as 1-2-3, operability and connectivity are greatly enhanced without adding complexity. Video Recording/Live Streaming/Editing/Transferring to any PACS-VNA-EMR and other features can be easily and readily deployed to fit your workflow and documentation needs. Having truly dependable and high-quality solutions for medical video management, allowing surgeons and clinicians to capture WHAT matters, WHEN it matters, is **TEAC's mission**.

Recording Times (for a 1TB Hard Drive)*

* Times are approximate.

High-Definition 1920 x 1080p 60fps				Standard-Definition 720 x 480			
20Mbps	15Mbps	10Mbps	5Mbps	8Mbps	6Mbps	4Mbps	2Mbps
111 hrs	148 hrs	222 hrs	444 hrs	278 hrs	370 hrs	556 hrs	1,111 hrs

Specifications

Storage & Display	
Recordable Devices	Internal Hard Drive (1TB), USB Flash Drive, USB Hard Drive
Built-in LCD Display	5-inch Touch Panel (Resistive type)
Recording Format	
Video	H.264 (Video), AAC (Audio) mts
Photo	JPEG, Uncompressed JPG, TIFF
Input/Output	
Video	SDI (BNC) 3G-SDI, HD-SDI, SD-SDI DVI** 1920x1200*, 1920x1080(1080-60p/59.94i), 1280x960, 1024x768 Analog HDTV (DVI-I**) 1920x1080 (1080-59.94i) S-Video NTSC Composite (BNC) NTSC RGB (DVI-I**) 525-60i
Audio	Stereo mini MIC (Input only), LINE RS-232C D-sub 9 pin
Other Interfaces	LAN RJ-45 (1000BASE-T, 100BASE-TX, 10BASE-T) USB3.0 USB Type-A x 2 on front (for Recordable Devices) USB2.0 USB Type-A x 4 on rear (for Accessories) External contact switch Stereo Mini jack x 3
General	
Power supply	AC 100V-230V, 50/60Hz
Dimensions (WxHxD)	Approx. 202 x 114 x 337 mm / 8.0 x 4.5 x 13.3 inch
Weight	Approx. 3.7 kg / 8.2 lbs.
Environments	Operating temperature range 5°C to 40°C / 41°F to 104°F Operating humidity range 30 to 80% RH (no condensation) Storage temperature range -10°C to 60°C / 14°F to 140°F
Certifications / Compliance	ANSI/AAMI ES60601-1, CAN/CSA-C22.2 NO.60601, CE MDR IEC60601-1, EN60601-1, EN60601-1-2, FCC Class A, FDA Class 1, RoHS
Accessories (Optional)	Foot-switch, Keyboard, Barcode Reader, Card Reader

*1 Input/output terminal is used common to DVI-I. *2 1920 x 1200 video recording is resized to 1728 x 1080.

Key Features



- Real-time Recording x Live Streaming
- One-touch operation x Built-in Touch Screen
- PACS/EMR Integration x Robust Security
- More Connectivity x More Recording Media



Blu-ray™ is a trademark of the Blu-ray Disc Association. Other company names, product names and logos in this document are the trademarks or registered trademarks of their respective owners. * Features and specifications are subject to change without notice.

TEAC America, Inc.,

10410 Pioneer Blvd. #1 Santa Fe Springs, CA 90670, U.S.A.
Tel.: +1-323-726-0303 Fax: +1-323-727-7688
Email: mrsales@teac.com https://teacmv.jp/en/